



Tecatel

Conmutador / Enrutador Audio/Vídeo

CONMAV-TEC

Automatic Scart Router

ESPECIFICACIONES TÉCNICAS / DATA SHEET



- Este dispositivo permite enviar diferentes señales entrantes a diferentes destinos.
 - Incluye 4 Euroconectores con soporte para vídeo RGB y compuesto.
 - Funciona con mando a distancia.
 - Dispone de modo de funcionamiento automático y manual.
-
- *This device allows to route different input signals to different outputs.*
 - *4 SCART connections, RGB and composite video signals.*
 - *Includes a remote control*
 - *Automatic and manual routing modes.*

Conexiones

- **4 ENTRADAS AUDIO/VIDEO:** 3 x EUROCONECTORES, 1 x 3 RCA
- **2 SALIDAS AUDIO/VIDEO:** 2 x EUROCONECTORES
- **1 SALIDA AUDIO ESTÉREO:** 2 x RCA

Connections


- **4 AUDIO/VIDEO INPUTS:** 3 x SCART, 1 x 3 RCA
- **2 AUDIO/VIDEO OUTPUTS:** 2 x SCART
- **1 AUDIO STEREO OUTPUT:** 2 x RCA



Tabla de conmutación / Switching table

Entrada / Input	Conexión / Connection	Señal / Signal
VCR	Euroconector (SCART)	CVBS & S-Video + Audio stereo
DVD	Euroconector (SCART)	CVBS & RGB + Audio stereo
SAT or STB	Euroconector (SCART)	CVBS & RGB + Audio stereo
Cámara / Camera	3 x RCA panel frontal / front panel	Vídeo compuesto (CVBS) + Audio stereo

Salida / Output	Conexión / Connection	Señal / Signal
TV	Euroconector (SCART)	CVBS & S-Video + Audio stereo
VCR	Euroconector (SCART)	CVBS & S-Video + Audio stereo
Hi-Fi	2 x RCA	Audio stereo

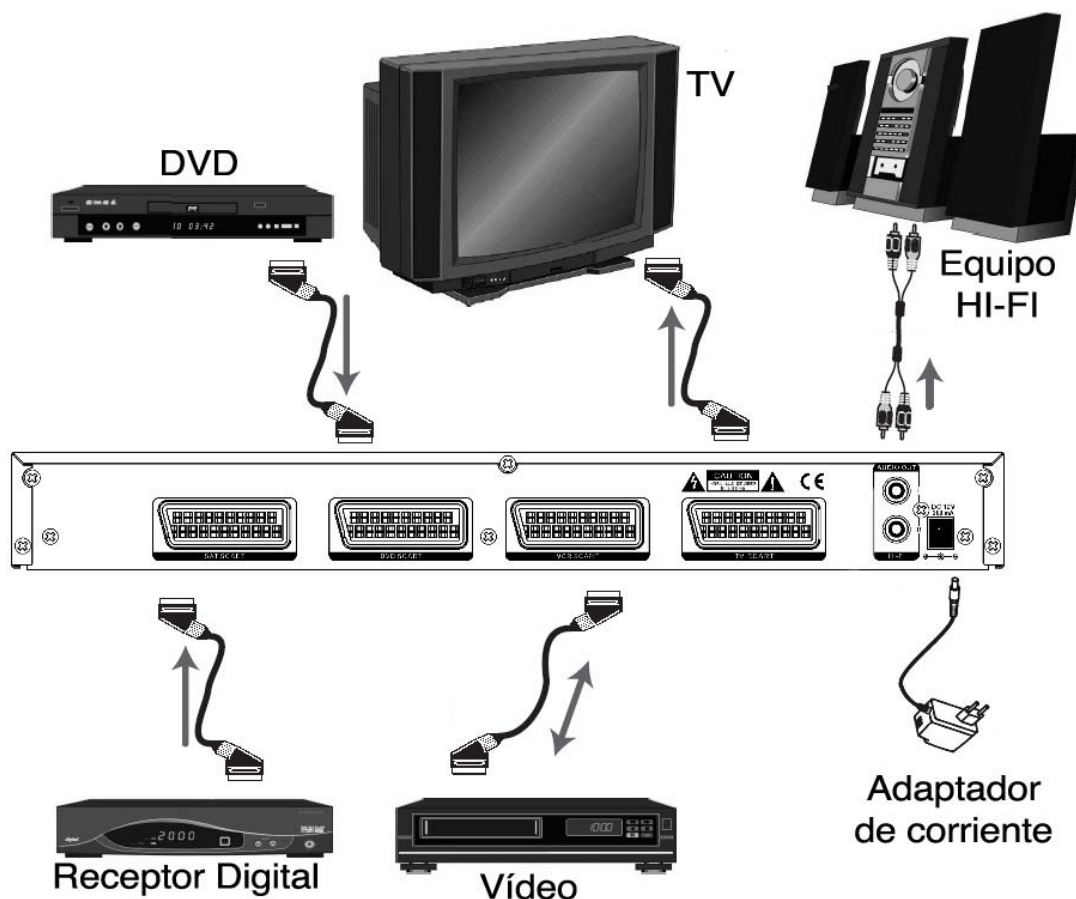



Tecatel

Posibilidades como Enrutador

Muestra en el TV	VCR – DVD – Receptor de satélite digital (terrestre) – Cámara/vídeo juego
Graba las fuentes	DVD (si es grabador) – TV – Receptor de satélite digital (terrestre) – Cámara
Envía un canal a otra habitación mediante un video sender (no incluido)	VCR – DVD – Receptor de satélite analógico – Receptor de satélite digital – Receptor digital terrestre – Cámara
Modo manual	Selección de la fuente a través del mando a distancia o del panel frontal
Modo automático	La fuente conectada al momento aparece en la TV.

Possibilities of the Router

Display on TV the sources	VCR – DVD – Analog SAT Receiver – Digital SAT Receiver – Digital Terrestrial Receiver (or Cable) – Camera – Games
Recording of the sources	DVD (if copy is allowed) – TV – Analog SAT Receiver – Digital SAT Receiver – Digital Terrestrial Receiver (or Cable) – Camera
Send TV Channel to another room thanks to a Video Sender (not provided)	VCR – DVD – Analog SAT Receiver – Digital SAT Receiver – Digital Terrestrial Receiver (or Cable) – Camera
Manual mode	Selection of the source from the remote control or from the Front panel
Automatic mode	The last powered set is routed to the TV

Alimentación / Power supply : DC 12V/ 250mA
Adaptador de corriente / Power adapter : 220-240V AC ~ 50 Hz (6W)
Dimensiones / Dimensions : 3605 x 215 x 45 mm

*Tecatel se reserva el derecho a cambiar o modificar las especificaciones sin previo aviso / These specifications are subject to modification